

H1-600CLW-GB2

Detailed Description

| Performance | | |
|--------------------|--------|-------|
| Lamp | Number | 1 |
| | Watts | 600W |
| InputVolts | 120V | 240V |
| Input Current@600W | 5.60A | 2.80A |
| Input Power@600W | 655W | 645W |
| Min Power Factor | 0.99 | |
| THD | <10% | |
| Crest Factor | <1.7 | |

| Physical | | |
|-----------------|---------|--------|
| Case Length | 273.5mm | 10.76" |
| Case Width | 178mm | 7.00" |
| Height | 110mm | 4.33" |
| Mounting Length | 261.5mm | 10.26" |
| Mounting Width | 100mm | 3.94" |
| Weight | 4.5kg | 9.92lb |

| Dimming Type | | | | |
|--------------|-----|-----|-----|-----|
| Gear | 300 | 400 | 600 | 660 |

Protections

- 1.End of Lamp Life(EOL)Protection
- 2.Short circuit protection
- 3.Open circuit protection
- 4.Ignition failure protection
- 5.Thermal protection


Installation & Application Notes

- 1.Max. allowable case temperature:75°C/167°F.
- 2.Ambient Temperature:-20...+40°C/-4...+104°F.
- 3.Max. Humidity:95%.
- 4.Ignition voltage is 5kV.


Performance Requirements:

| | |
|-------------------------|------------|
| Rated mains voltage: | 120-240V |
| Voltage range (+/-10%): | 108-264V |
| Mains frequency: | 50/60Hz |
| Operation frequency : | 100-120kHz |

Main Dimension

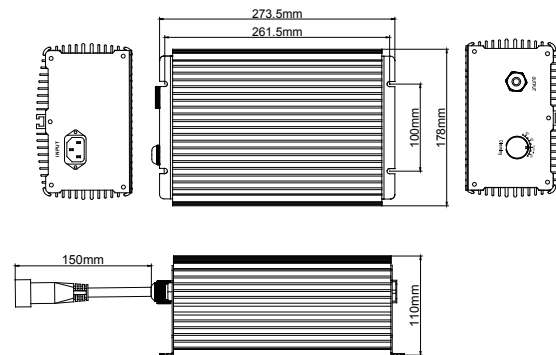

Wiring Diagram

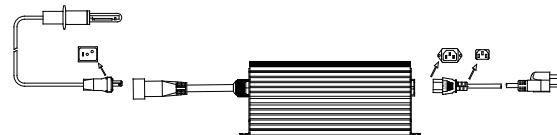

Ballast Case must be Grounded

Tcase max=75°C/167°F

