

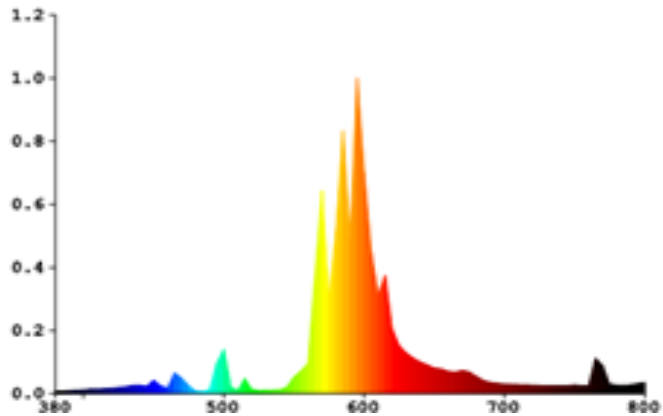


Product Specification



12323 Plaza Dr. Parma, OH 44130
Tel: 888-352-0601

1000W Sodium Lamps

Lamp Description: HPS1000W/U/HO/E25/250V/E39		Product No: 2102013														
Lamp Type: US High Pressure Sodium Lamps (High-Light Effect)																
Control Gear: Sodium Ballast + Ignitor or Electronic Ballast																
<p>Performance Data:</p> <table border="0"> <tr> <td>Light output (Lumens@100 hours)</td> <td>140000V/130000H</td> </tr> <tr> <td>Lamp Lumens (Lumens /Watt)</td> <td>140V/130H</td> </tr> <tr> <td>Rated Life (h)</td> <td>18000</td> </tr> <tr> <td>Correlated Colour Temperature (K)</td> <td>2000K</td> </tr> <tr> <td>Colour Rendering Index (CRI) (Ra)</td> <td>20</td> </tr> <tr> <td>Starting time (s)</td> <td>10</td> </tr> <tr> <td>Burning Position</td> <td>Universal</td> </tr> </table>		Light output (Lumens@100 hours)	140000V/130000H	Lamp Lumens (Lumens /Watt)	140V/130H	Rated Life (h)	18000	Correlated Colour Temperature (K)	2000K	Colour Rendering Index (CRI) (Ra)	20	Starting time (s)	10	Burning Position	Universal	 
Light output (Lumens@100 hours)	140000V/130000H															
Lamp Lumens (Lumens /Watt)	140V/130H															
Rated Life (h)	18000															
Correlated Colour Temperature (K)	2000K															
Colour Rendering Index (CRI) (Ra)	20															
Starting time (s)	10															
Burning Position	Universal															
<p>Physical Data / Requirements</p> <table border="0"> <tr> <td>Base Designation</td> <td>E39</td> </tr> <tr> <td>Bulb Designation</td> <td>E25</td> </tr> <tr> <td>Bulb Diameter (mm)</td> <td>80</td> </tr> <tr> <td>Light overall LOength (mm)</td> <td>383-15</td> </tr> <tr> <td>Light Centre Length (mm)</td> <td>222±6</td> </tr> <tr> <td>Max. Base Temperature (°C)</td> <td>250</td> </tr> <tr> <td>Max. Bulb Temperature (°C)</td> <td>400</td> </tr> </table>		Base Designation	E39	Bulb Designation	E25	Bulb Diameter (mm)	80	Light overall LOength (mm)	383-15	Light Centre Length (mm)	222±6	Max. Base Temperature (°C)	250	Max. Bulb Temperature (°C)	400	
Base Designation	E39															
Bulb Designation	E25															
Bulb Diameter (mm)	80															
Light overall LOength (mm)	383-15															
Light Centre Length (mm)	222±6															
Max. Base Temperature (°C)	250															
Max. Bulb Temperature (°C)	400															
<p>Lamp Electrical Data / Requirements</p> <table border="0"> <tr> <td>Standard:</td> <td>ANSI C78-2007</td> </tr> <tr> <td>Lamp Wattage (W)</td> <td>1000W</td> </tr> <tr> <td>Lamp Operating Voltage (V)</td> <td>250</td> </tr> <tr> <td>Lamp Operating Current (A)</td> <td>4.7</td> </tr> <tr> <td>Min. - Max. Starting Pulse (KV)</td> <td>3-5</td> </tr> <tr> <td>Min. Pulse Width at 900V (us)</td> <td></td> </tr> <tr> <td>Min. Pulse Rate (Per½ cycle)</td> <td></td> </tr> </table>		Standard:	ANSI C78-2007	Lamp Wattage (W)	1000W	Lamp Operating Voltage (V)	250	Lamp Operating Current (A)	4.7	Min. - Max. Starting Pulse (KV)	3-5	Min. Pulse Width at 900V (us)		Min. Pulse Rate (Per½ cycle)		<p>Spectrogram</p> 
Standard:	ANSI C78-2007															
Lamp Wattage (W)	1000W															
Lamp Operating Voltage (V)	250															
Lamp Operating Current (A)	4.7															
Min. - Max. Starting Pulse (KV)	3-5															
Min. Pulse Width at 900V (us)																
Min. Pulse Rate (Per½ cycle)																
<p>Notes: The specification contains data about typical performance on 50/60Hz sine wave ballast at nominal power. Actual values may depend on ballast and applications. (Matching the electronic ballast effect is better, the use longer)</p>																