

# H1-600240AW-GBA

## Detailed Description

Performance		
Lamp	Number	1
	Watts	600W
InputVolts		240V
Input Current@600W		2.80A
Input Power@600W		645W
Min Power Factor		0.99
THD		<10%
Crest Factor		<1.7

Physical		
Case Length	190mm	7.48"
Case Width	181mm	7.13"
Height	99mm	3.90"
Weight	2.7kg	5.95lb


Dimming Type				
Gear	300	400	600	660

Protections	
1.End of Lamp Life(EOL)Protection	
2.Short circuit protection	
3.Open circuit protection	
4.Ignition failure protection	
5.Thermal protection	


Installation & Application Notes	
1.Max. allowable case temperature:75°C/167°F.	
2.Ambient Temperature:-20...+40°C/-4...+104°F.	
3.Max. Humidity:95%.	
4.Ignition voltage is 5kV.	

Performance Requirements:	
Rated mains voltage:	120-240V
Voltage range (+/-10%):	108-264V
Mains frequency:	50/60Hz
Operation frequency :	100-120kHz

### Main Dimension

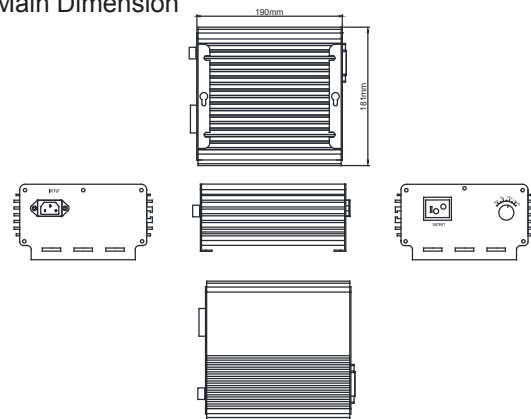

### Wiring Diagram

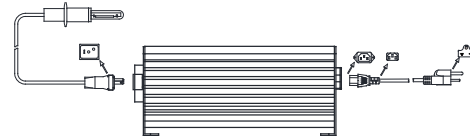

Ballast Case must be Grounded

Tcase max=75°C/167°F

