

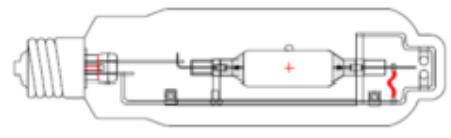


Product Specification

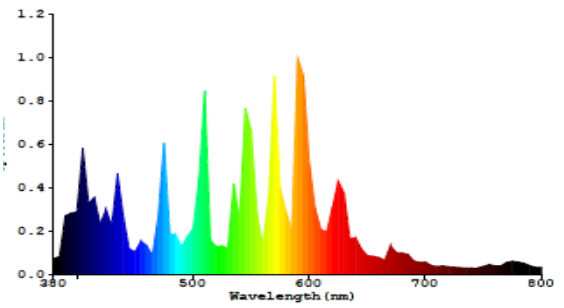

12323 Plaza Dr. Parma, OH 44130
Tel: 888-352-0601

600W Metal Halide Lamps

Lamp Description: MH600W/U/PS/TT75/E39/4K		Product No: 1601014																	
Lamp Type : US Metal Halide Lamps																			
Control Gear: Magnetic Ballast+Ignitor or Electronic Ballast																			
<p>Performance Data:</p> <table border="0"> <tr> <td>Light output (Lumens@100 hours)</td> <td>66000V/55000H</td> </tr> <tr> <td>Lamp Lumens (Lumens /Watt)</td> <td>105V/90H</td> </tr> <tr> <td>Rated Life (h)</td> <td>12000V/10000</td> </tr> <tr> <td>Correlated Colour Temperature</td> <td>4200K</td> </tr> <tr> <td>Colour Rendering Index(CRI) or (Ra)</td> <td>70</td> </tr> <tr> <td>Starting time (s)</td> <td>5</td> </tr> <tr> <td>Burning position</td> <td>Universal</td> </tr> </table>		Light output (Lumens@100 hours)	66000V/55000H	Lamp Lumens (Lumens /Watt)	105V/90H	Rated Life (h)	12000V/10000	Correlated Colour Temperature	4200K	Colour Rendering Index(CRI) or (Ra)	70	Starting time (s)	5	Burning position	Universal	 			
Light output (Lumens@100 hours)	66000V/55000H																		
Lamp Lumens (Lumens /Watt)	105V/90H																		
Rated Life (h)	12000V/10000																		
Correlated Colour Temperature	4200K																		
Colour Rendering Index(CRI) or (Ra)	70																		
Starting time (s)	5																		
Burning position	Universal																		
<p>Physical Data/Requirements</p> <table border="0"> <tr> <td>Base Designation</td> <td>E39</td> </tr> <tr> <td>Bulb Designation</td> <td>TT75</td> </tr> <tr> <td>Bulb Diameter (mm)</td> <td>75</td> </tr> <tr> <td>Max. Overall Length (mm)</td> <td>292-10</td> </tr> <tr> <td>Light Centre (mm)</td> <td>178±6</td> </tr> <tr> <td>Max. Base Temperature(°C)</td> <td>250</td> </tr> <tr> <td>Max. Bulb Temperature (°C)</td> <td>500</td> </tr> <tr> <td>Luminaire Type</td> <td>Closed</td> </tr> </table>		Base Designation	E39	Bulb Designation	TT75	Bulb Diameter (mm)	75	Max. Overall Length (mm)	292-10	Light Centre (mm)	178±6	Max. Base Temperature(°C)	250	Max. Bulb Temperature (°C)	500	Luminaire Type	Closed		
Base Designation	E39																		
Bulb Designation	TT75																		
Bulb Diameter (mm)	75																		
Max. Overall Length (mm)	292-10																		
Light Centre (mm)	178±6																		
Max. Base Temperature(°C)	250																		
Max. Bulb Temperature (°C)	500																		
Luminaire Type	Closed																		
<p>Lamp Electrical Data /Requirements</p> <table border="0"> <tr> <td>Standard:</td> <td>ANSI C78.43-2007</td> </tr> <tr> <td>Lamp Wattage (W)</td> <td>620W</td> </tr> <tr> <td>Lamp Operating Voltage(V)</td> <td>115</td> </tr> <tr> <td>Lamp Operating Current (A)</td> <td>6.0</td> </tr> <tr> <td>Min-Max. Starting Pulse (KV)</td> <td>4-5</td> </tr> <tr> <td>Min. Pulse Width at 900V (us)</td> <td>1.95</td> </tr> <tr> <td>Min. Pulse Rate (Per 1/2 cycle)</td> <td>1</td> </tr> </table>		Standard:	ANSI C78.43-2007	Lamp Wattage (W)	620W	Lamp Operating Voltage(V)	115	Lamp Operating Current (A)	6.0	Min-Max. Starting Pulse (KV)	4-5	Min. Pulse Width at 900V (us)	1.95	Min. Pulse Rate (Per 1/2 cycle)	1				
Standard:	ANSI C78.43-2007																		
Lamp Wattage (W)	620W																		
Lamp Operating Voltage(V)	115																		
Lamp Operating Current (A)	6.0																		
Min-Max. Starting Pulse (KV)	4-5																		
Min. Pulse Width at 900V (us)	1.95																		
Min. Pulse Rate (Per 1/2 cycle)	1																		
<p>Notes: The specification contains data about typical performance on 50/60Hz sine wave ballast at nominal power. Actual values may depend on ballast and applications. (Matching the electronic ballast effect is better, the use longer)</p>																			
Write by:	Audit:	approver:	Date:																